



Concealed mortise hinge



- > Area of application: For wooden frames, for flush wooden interior doors
- > Opening angle: $\leq 180^\circ$
- > Door width: $\leq 1,000$ mm
- > Door height: $\leq 2,000$ mm
- > Door thickness: ≤ 40 mm
- > Size: 95.0 mm
- > Adjustment facility: Continuously 3D adjustment: Height ± 1.5 mm, side and closing pressure ± 1 mm

Mounting



Drilling pattern




Number of hinges	Door width mm				
	600	700	800	900	1000
2	50 kg	46 kg	42 kg	40 kg	36 kg
3	56 kg	51 kg	48 kg	45 kg	40 kg
4	63 kg	57 kg	53 kg	50 kg	45 kg

Material	Finish	DIN left	DIN right
Zinc alloy	Matt nickel plated	927.32.036	927.32.046


Packing: 1 or 3 pieces

Concealed mortise hinge




- > Area of application: For wooden frames, for flush wooden interior doors
- > Opening angle: $\leq 180^\circ$
- > Door width: $\leq 1,000$ mm
- > Door height: $\leq 2,000$ mm
- > Door thickness: ≥ 40 mm
- > Size: 111.5 mm
- > Adjustment facility: Continuously 3D adjustable: Height ± 1.5 mm, side and closing pressure ± 1 mm

Installation

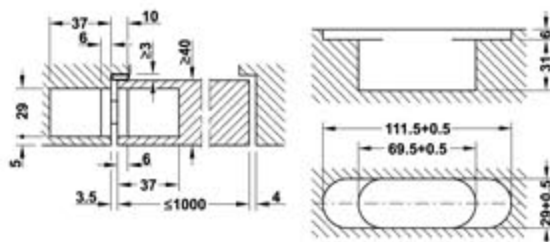

Routing pattern for frame and door

Weight table



- ① 4 hinges
- ② 3 hinges
- ③ 2 hinges

Material	Finish	DIN left	DIN right
Zinc alloy	Matt nickel plated	927.32.006	927.32.016
	Polished nickel plated	927.32.007	927.32.017
	Polished gold coloured	927.32.008	927.32.018

